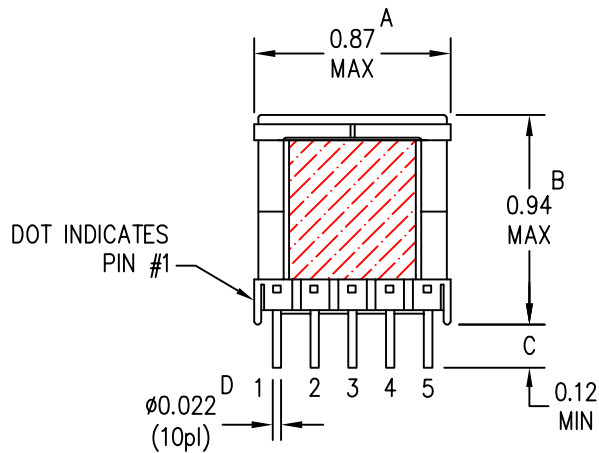
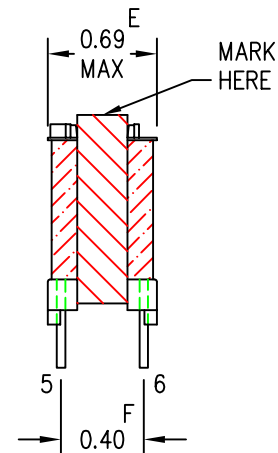




**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

FRONT VIEWSIDE VIEWBOTTOM VIEWSCHEMATICELECTRICAL TEST PARAMETERS:INDUCTANCE @ 200kHz/0.1VAC

L(5-1)=30μH ±10%

LEAKAGE INDUCTANCE @ 100kHz/0.1VAC

SHORT PINS: 10,9

LL(5-1)=725nH MAX

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (5-1)=50mΩ MAX

(10-9)=13mΩ MAX

HIPOT

1800VAC @ 60Hz

BTWN 5 TO 10

TURNS RATIO

(5-1):(10-9)=1.0:0.50

COURTESY DRAWING

FILE NAME

RLTI-1001

-TOLERANCES-		CUSTOMER NAME			THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY						
.XX=± 0.03		DESCRIPTION						
.XXX=± 0.015		30μH FLYBACK			THIS DOCUMENT IS FOR REFERENCE ONLY			
ANGULAR=± 3°		ENGINEER CONTACT		DWN BY				
FRACTIONAL=± 1/16"		ENGINEERING@RENCUSA.COM		M. HILLER				
		DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐			REV	PAGE
		04/02/20	NTS				C	1 OF 1