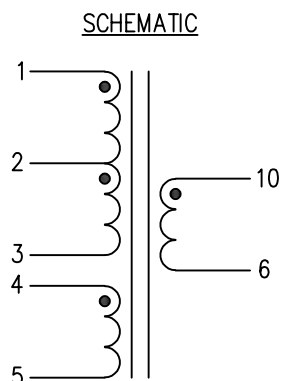
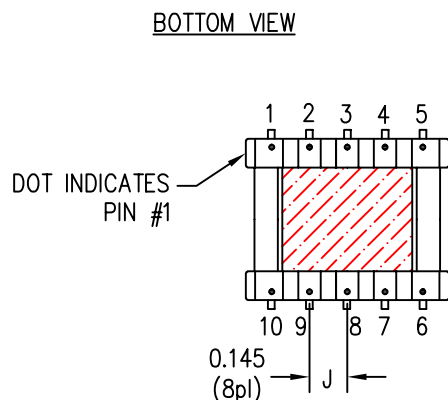
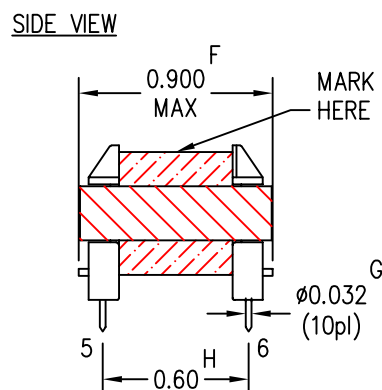
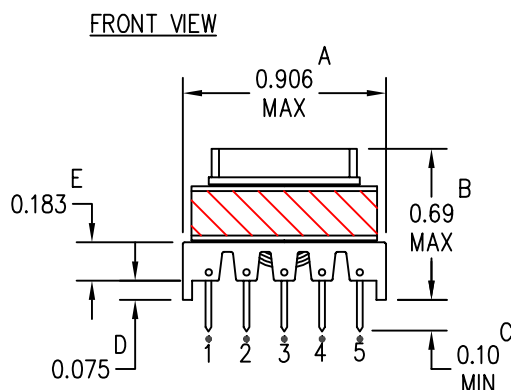


**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

**ELECTRICAL TEST PARAMETERS:****INDUCTANCE @ 10kHz/0.1VAC**

L(1-3)=200.0μH ±10%

LEAKAGE INDUCTANCE @ 100kHz/0.1VAC

SHORT PINS: 4,5,6,10

Le(1-3)=6.0μH MAX

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (1-3)=0.193Ω MAX

(4-5)=0.143Ω MAX

(10-6)=28mΩ MAX

HIPOT

3600VAC @ 60Hz

BTWN 1,4 TO 10

TURNS RATIO

(1-3):(4-5)=1.0:0.31

(1-3):(10-6)=1.0:0.15

COURTESY DRAWING

FILE NAME

RLTI-1050

-TOLERANCES-		CUSTOMER NAME			THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY					
.XX=±	0.03	DESCRIPTION			THIS DOCUMENT IS FOR REFERENCE ONLY		
.XXX=±	0.015	EF20 200μH 27W FLYBACK					
ANGULAR=±	3°	ENGINEER CONTACT		DWN BY			
		ENGINEERING@RENCUSA.COM		M. HILLER			
FRACTIONAL=±	1/16"	DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐		REV	PAGE
		04/02/20	NONE			G	1 OF 1