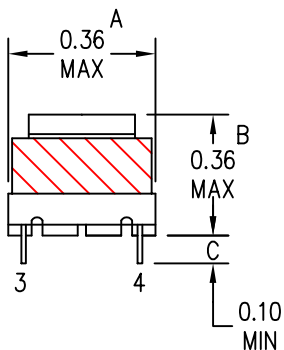
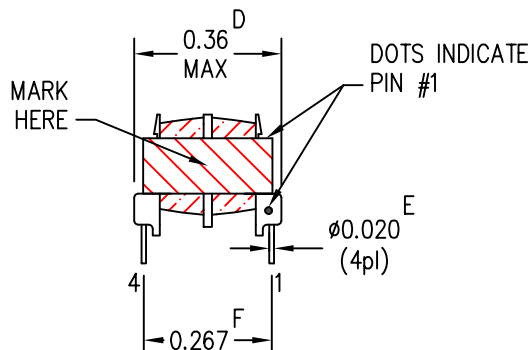




**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

FRONT VIEWSIDE VIEWBOTTOM VIEWSCHEMATICELECTRICAL TEST PARAMETERS:INDUCTANCE @ 10kHz/0.1VACBALANCE WITHIN 2%

L(1-2)=2.00mH MIN

L(3-4)=2.00mH MIN

LEAKAGE INDUCTANCE @ 100kHz/0.1VACSHORT PINS: 3,4

LL(1-2)=18.0μH ±20%

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (1-2)=0.47Ω MAX

(4-3)=0.47Ω MAX

HIPOT

1500VAC @ 60Hz

BTWN 1 TO 4

TURNS RATIO

(1-2):(4-3)=1.0:1.0

COURTESY DRAWING

FILE NAME

RLTI-1081

- TOLERANCES -		CUSTOMER NAME				THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY							
.XX=±	0.03	DESCRIPTION				THIS DOCUMENT IS FOR REFERENCE ONLY			
.XXX=±	0.015	EE8.3 CM CHOKE							
ANGULAR=±		ENGINEER CONTACT		DWN BY					
3°		ENGINEERING@RENCUSA.COM		M. HILLER					
FRACTIONAL=±		DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐			REV	PAGE	
1/16"		04/02/20	NONE				B	1 OF 1	