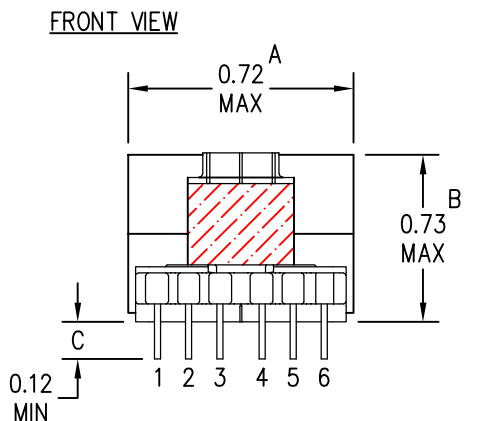
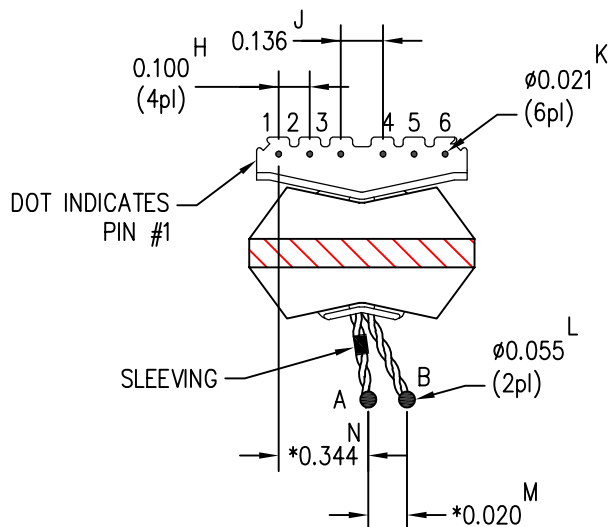
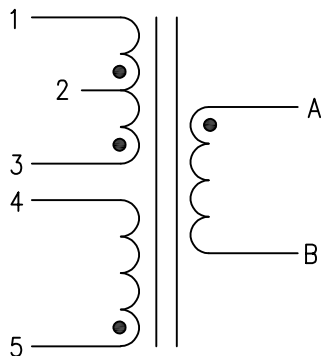
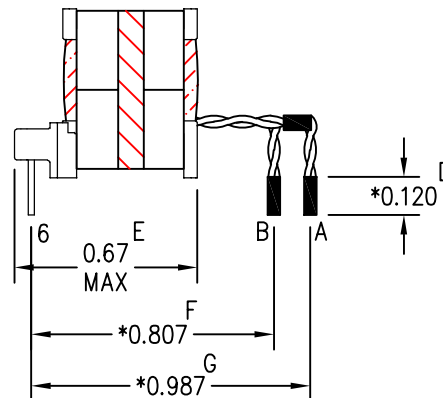


**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

**BOTTOM VIEW****SCHEMATIC****SIDE VIEW***EASILY FORMABLE TOELECTRICAL TEST PARAMETERS:INDUCTANCE @ 100kHz/0.1VAC

L(3-1)=370μH ±7%

LEAKAGE INDUCTANCE @ 100kHz/0.1VACSHORT PINS: 4,5,A,B

LL(3-1)=6.0μH MAX

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (1-2)=0.58Ω MAX

(5-4)=81mΩ MAX

(A-B)=4mΩ MAX

HIPOT

3750VAC @ 60Hz

BTWN 1,4 TO A

1500VDC

BTWN 1 TO 4

2500VAC @ 60Hz

BTWN 1,4,A TO CORE

TURNS RATIO

(3-1):(A-B)=0.6:0.05

(3-1):(5-4)=0.6:0.20

COURTESY DRAWING

FILE NAME

RLTI-1083

- TOLERANCES -		CUSTOMER NAME			THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY						
.XX=±	0.03	DESCRIPTION			THIS DOCUMENT IS FOR REFERENCE ONLY			
.XXX=±	0.015	FLYBACK FOR CHARGER						
ANGULAR=±	3°	ENGINEER CONTACT		DWN BY				
		ENGINEERING@RENCUSA.COM		M. HILLER				
FRACTIONAL=±	1/16"	DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐			REV	PAGE
		04/02/20	NONE				B	1 OF 1