
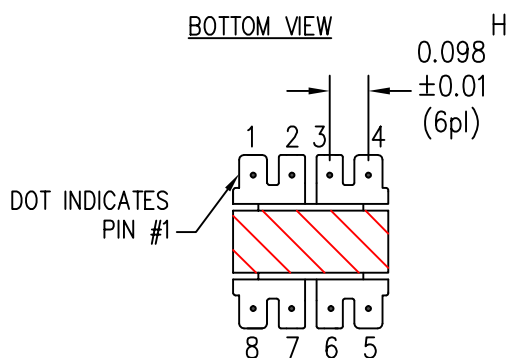
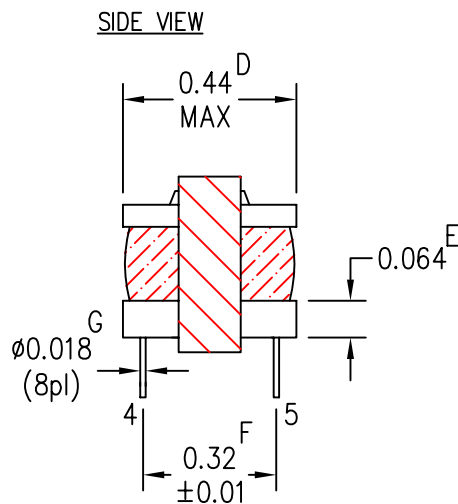
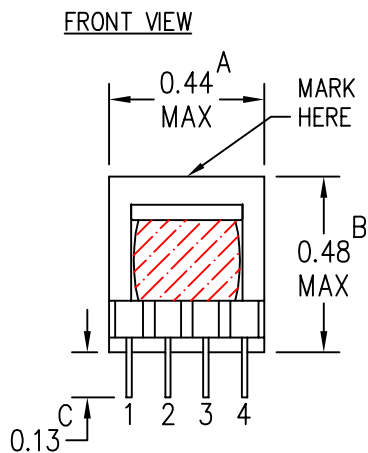


**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

**ELECTRICAL TEST PARAMETERS:**INDUCTANCE @ 10kHz/0.1VAC

L(2-1)=1100.0μH ±5%

LEAKAGE INDUCTANCE @ 100kHz/0.1VAC

SHORT PINS: 3,4,5,6,7,8

LL(2-1)=30.0μH MAX

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (2-1)=2.15Ω MAX

(3-4)=0.216Ω MAX

(7-5)=0.027Ω MAX

(8-6)=0.027Ω MAX

HIPOT

1500VAC @ 60Hz

BTWN 1,2,3,4 TO 5,6,7,8

600VAC @ 60Hz

BTWN 1,2 TO 3,4

BTWN 5,7 TO 6,8

TURNS RATIO

(2-1):(3-4)=1.0:0.20

(2-1):(8-6)=1.0:0.05

(2-1):(7-5)=1.0:0.05

COURTESY DRAWING

FILE NAME

RLTI-1094

-TOLERANCES-		CUSTOMER NAME			THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY					
.XX=±	0.03	DESCRIPTION			THIS DOCUMENT IS FOR REFERENCE ONLY		
.XXX=±	0.015	800μH DCM FLYBACK (PMP9503)					
ANGULAR=±	3°	ENGINEER CONTACT		DWN BY			
		ENGINEERING@RENCUSA.COM		M. HILLER			
FRACTIONAL=±	1/16"	DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐		REV	PAGE
		04/02/20	NTS			C	1 OF 1