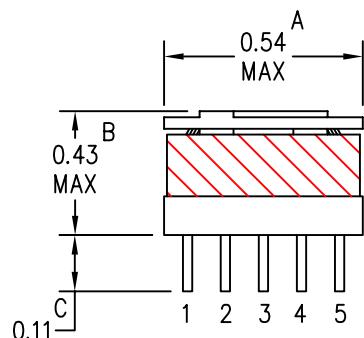
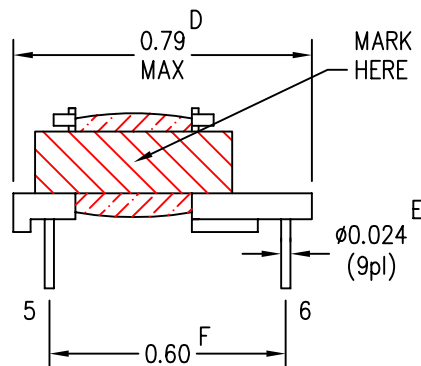
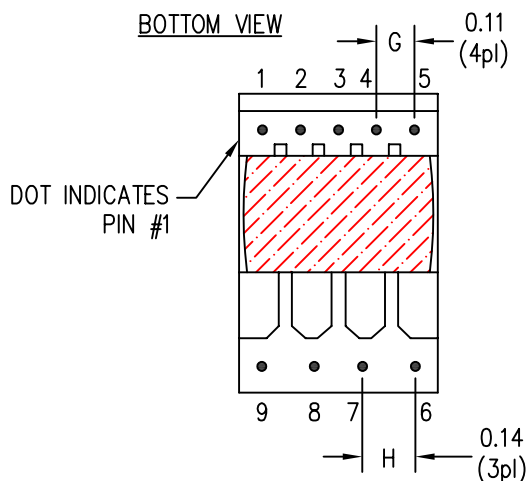



**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

FRONT VIEWSIDE VIEWBOTTOM VIEWSCHEMATICELECTRICAL TEST PARAMETERS:INDUCTANCE @ 10kHz/0.1VAC

L(4-5)=2.00mH ±10%

LEAKAGE INDUCTANCE @ 100kHz/0.1VAC

SHORT PINS: 1,2,6,9

LL(1-2)=150.0μH MAX

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (4-5)=12.1Ω MAX

(2-1)=1.65Ω MAX

(9-6)=98.4mΩ MAX

HIPOT

3000VAC @ 60Hz

BTWN 1,2,3,4,5 TO 9,6

1000VAC @ 60Hz

BTWN 1,2 TO 4,5

TURNS RATIO

(4-5):(2-1)=1.0:0.25

(4-5):(9-6)=1.0:0.16

COURTESY DRAWING

FILE NAME

RLTI-1105

- TOLERANCES -		CUSTOMER NAME			THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY					
.XX=±	0.03	DESCRIPTION			THIS DOCUMENT IS FOR REFERENCE ONLY		
		2.0mH FLYBACK (PMP9243)					
.XXX=±	0.015	ENGINEER CONTACT		DWN BY			
		ENGINEERING@RENCUSA.COM		M. HILLER			
ANGULAR=±	3°	DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐		REV	PAGE
		04/02/20	NTS			A	1 OF 1
FRACTIONAL=±	1/16"						