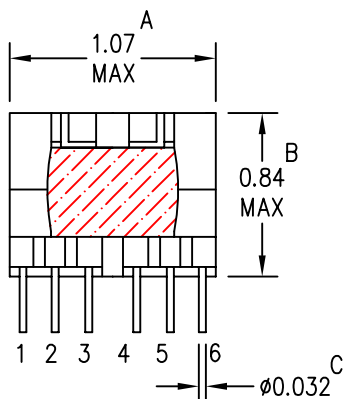
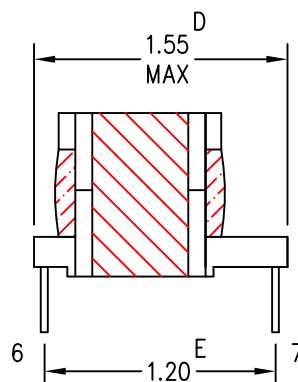
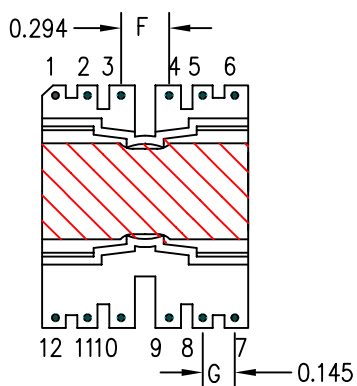
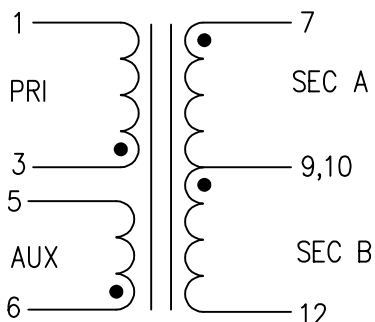


**RENCO ELECTRONICS, INC.**

595 INTERNATIONAL PL. • ROCKLEDGE, FLORIDA 32955
 ph. (321)637-1000 fax (321)637-1600
 web www.rencousa.com < > email engineering@rencousa.com

FRONT VIEWSIDE VIEWBOTTOM VIEWSCHEMATICELECTRICAL TEST PARAMETERS:INDUCTANCE @ 100kHz 0.1VAC

L(3-1)=840.0μH ±5%

LEAKAGE INDUCTANCE @ 100kHz/0.1VACSHORT PINS: 7,9,10,12

LL(3-1)=13μH ±15%

DC RESISTANCE OHMS (Ω) @ 25°C

DCR: (3-1)=0.402Ω MAX

(6-5)=25mΩ MAX

(7-9)=2.5mΩ MAX

(10-12)=2.5mΩ MAX

HIPOT

3000VAC @ 60Hz

BTWN 3,6 TO 10,9

1500VAC @ 60Hz

BTWN 1 TO 6

TURNS RATIO

(3-1):(7-9)=3.2:0.06

(3-1):(10-12)=3.2:0.06

(3-1):(6-5)=3.2:0.09

COURTESY DRAWING

FILE NAME

RLTI-1233

-TOLERANCES-		CUSTOMER NAME			THIS COURTESY PRINT IS PROPRIETARY AND CONFIDENTIAL NO PART OF THIS COURTESY PRINT MAY BE DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT FROM RENCO ELECTRONICS INC.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DIGI-KEY					
.XX=± 0.03		DESCRIPTION					
.XXX=± 0.015		HB LLC RESONANT XFMR			THIS DOCUMENT IS FOR REFERENCE ONLY		
ANGULAR=± 3°		ENGINEER CONTACT		DWN BY			
FRACTIONAL=± 1/16"		ENGINEERING@RENCUSA.COM		M. HILLER			
		DATE	SCALE	RoHS COMPLIANT: YES ☒ NO ☐		REV	PAGE
		04/02/20	NTS			A	1 OF 1